

PC, PP, PVC Corrugated Sheet Extrusion Line

PC、PP、PVC波浪板生产线

Feature:

High special design for screw, it fulfillize the low temperature extrusion.

Clothes-hanger flat T-Die, equiped with pneumatic up-downm calibration unit, it is flexible, and reliable, and it is easy to adjust the thickness.

The rubber hall-off is equiped with corrugated style, make the hall-off stable, convenient adjustment unit between roller, has high ability to deal with the different codition.

Precise design cutting method, helical cutting automatically, can demand the fixed-length automatic cutting, In reliefs the humanist design idea.

设备特点:

优质的专业螺杆设计，真正实现物料的低温挤出；

衣架式平板机头，配以气动开合的定型模，灵活安全的升降机构，使成型更为可靠，厚度调整极为方便；


采用与波形一致的橡胶牵引辊，使牵引特别平稳，方便快捷的辊距调节装置，具有各种情况的现场处理能力；

精心设计的切割方式，斜刃自动切割，使切口更为整齐，可按需定长自动切割，凸现以人为本的设计理念。

主要技术参数: Main Technical Specification

机型 Model	GW100-45-1800	GW105/33-1500	GW80/156-1500
适用原料 Suitable material	PC	PP、PE	PVC
制品宽度 Products width	1400mm	1050mm	1200mm
制品厚度 Products thickness	0.6-1.5mm	0.5-3mm	0.8-3mm
挤出机规格 Extruder model	Ø100/38-Ø45/30	Ø105/33	GW80/156
设计挤出产量 Designed capacity	250Kg/h	200Kg/h	300Kg/h

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

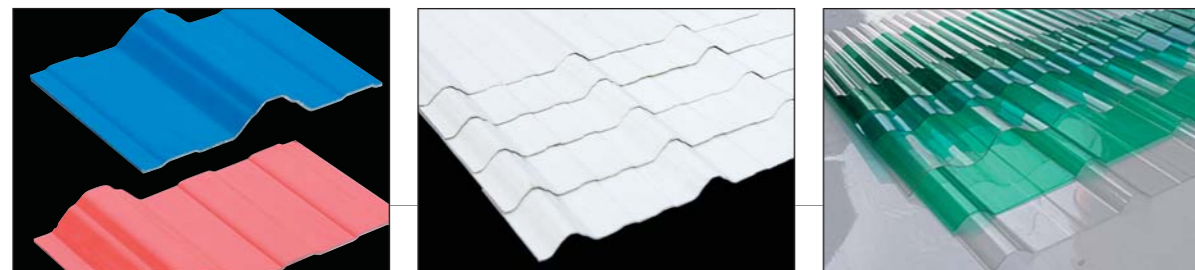

PVC Corrugated Board Feature And Application:

The fire protection performance is remarkable, difficult to burn. Anti-corosion, Acidproof, alkali, radiates quickly, high lighting, long life.

Adopt special technology, Bears the outdoor atmospheric insolation, the heat insulation performance is good, in the hot summer can provide compares the metal to use a tile more comfortable environment.

The applicable scope is broad, the workshop, the warehouse, the vehicle shed, the agricultural market fair, the brattice, the wall body, the temporary store, the heat insulation awning and so on are suitable.

PVC波浪瓦的特点及应用:

防火性能卓越，属难燃材料，无自燃性，抗化学腐蚀、耐酸、碱，散热快，采光性能极佳，寿命长；

采用特殊技术配方，耐室外大气暴晒，隔热性能好，炎热夏季中能提供较金属用瓦更舒适的环境；

适用范围广，厂房、仓库、车棚、农贸市场、围板、墙身、临时商铺、隔热棚等非常适用。