


AGENT WANTED

SHARE SUCCESS

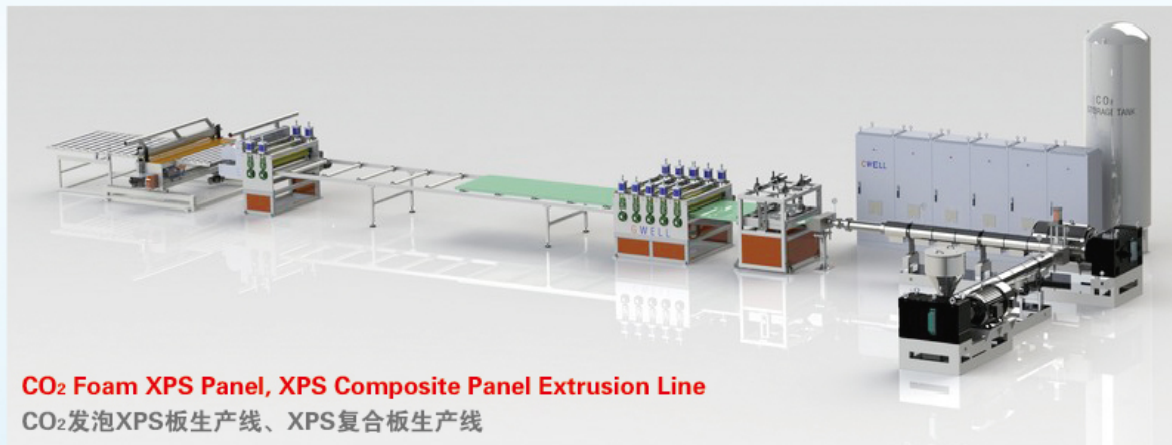

CO₂ Foam XPS Panel, XPS Composite Panel Extrusion Line
CO₂发泡XPS板生产线、XPS复合板生产线

Add: 16# Donglin Industry Park Chengxiang Taicang Suzhou China 215400

地址: 苏州市太仓城厢郭家路东林联发产业园16号

Tel: +86-13906225966 +86-512-53660797 +86-512- 53660799



Fax: +86-512-53660798 +86-512- 53660799

Email: info@gwell.cn sales@gwell.cn

www.gwell.cn



Gwell reserves the right to make technical changes.

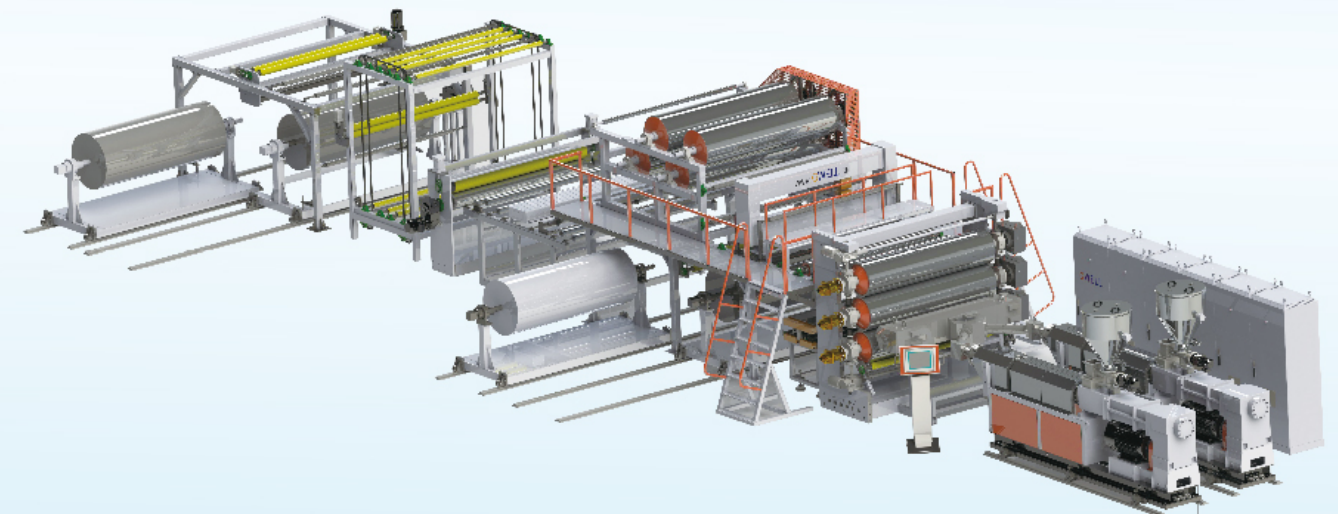

CHINA GWELL MACHINERY CO., LTD.

苏州金韦尔机械有限公司

Waterproof Membrane Extrusion

防水卷材挤出生产线



Introduction

公司简介

China Gwell Machinery Co., Ltd is one of the leading suppliers of extrusion machinery and systems for the production of

■ Film ■ Sheet ■ Profile ■ Pipe

Gwell Company is located in beautiful Suzhou city, very close to Shanghai. The workshop is around 16,000 square meters. Its manufacture capacity of each year is more than 150 extrusion lines.

Gwell Company dedicated to high level products and international market, along with group hi-tech and key parts capacity. "profession delivers customer value" is our long term management idea.

In recent years, Gwell Company's extrusion lines have been run smoothly in many places of china, and exported to more than 20 countries, they are warmly welcomed.



苏州金韦尔机械有限公司是一个专业制造

- 薄膜
- 片板
- 型材
- 管材

生产线的高科技企业。公司制造基地紧邻上海，位于风景秀丽的苏州太仓城厢高新技术产业园。现有建筑面积16000多平方米，具备年产各类挤出生产线150余条的生产能力。

金韦尔公司依托集团强大的科技装备实力及关键件产能，致力于高端产品的开发、国际市场的开拓。"专业塑造顾客价值"是公司长期的经营理念。

近年来，公司产品广泛的应用于全国各地，并出口到二十多个国家和地区，深受客户好评。

PE Extra-width Geo-membrane, Waterproof Membrane Extrusion Line

PE超宽幅土工膜、防水卷材生产线

PE Extra-width Geo-membrane, waterproof membrane PE宽幅土工膜、防水卷材

用途：工业与民用建筑的屋面防水，包括种植屋面，平屋面，坡屋面，建筑物地下防水：包括水库、堤坝、水池防水、隧道、粮库、人防工程、垃圾掩埋场、人工湖防水等。
Application：For waterproof usage in industrial & civil buildings including planted roof, plane and pitched roof. Underground waterproof: reservoir, dam, pool. Waterproof usage in tunnel, grain depot, air-raid shelters, landfill, artificial Lake etc.



主要技术参数: Main Technical Specification			
Model	GWS130	GWS150	GWS200
Material	PE	PE	PE
Geo-membrane width	4000mm	7000mm	7000mm
Geo-membrane thickness	0.5-3mm	0.8-3mm	0.8-3 mm
Max. Capacity	500 kg/h	1000 kg/h	1500 kg/h
Designed line speed	8m/min	5m/min	8m/min


备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

PVC, CPE Waterproof Membrane, Wide Floor Leather Extrusion Line

PVC、CPE防水卷材、宽幅地板革生产线

PVC, CPE Waterproof membrane PVC、CPE防水卷材

用途：用于工业与建筑业的各种屋面防水，地下室、水库、堤坝、公路隧道、铁路隧道、防空洞、粮库、垃圾厂、废水处理等建筑防水工程。
Application: Industrial and construction roof waterproofing, basements, reservoirs, dams, highways, tunnels, railway tunnels, air-raid shelter, grain depot, garbage plant, wastewater treatment construction waterproof projects.

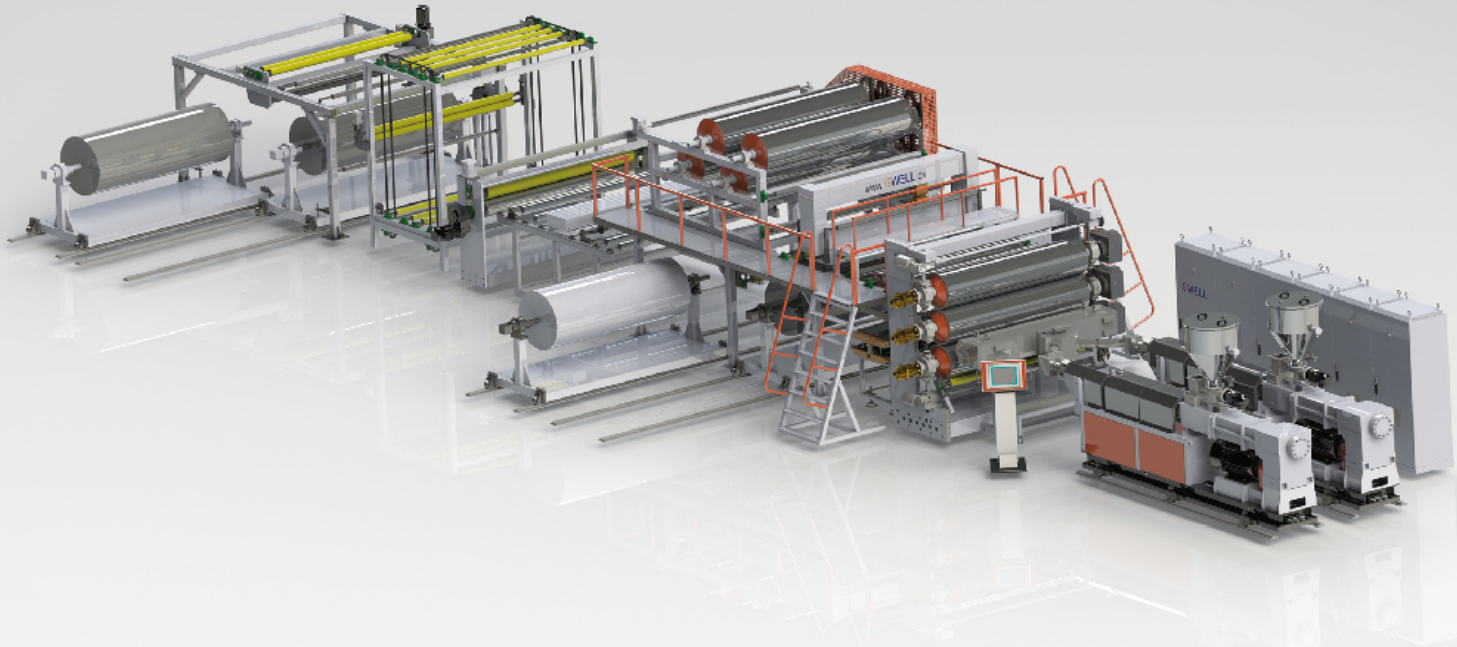

主要技术参数: Main Technical Specification			
Model	GWC80- WC65	GWC92-GWC80	GWP110- GWP 110
Material	PVC、CPE	PVC、CPE	PVC、CPE
Membrane width	2000mm	2000mm	2000mm
Membrane thickness	1-3mm	1-3mm	1-3mm
Max. capacity	550 kg/h	1000 kg/h	1000 kg/h
Designed line speed	5m/min	10m/min	10m/min


备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

TPO、EVA Waterproof Membrane Extrusion Line

TPO、EVA防水卷材生产线

TPO waterproof membrane TPO防水卷材

用途：是由热塑性聚烯烃加入抗氧化剂、防老剂、软化剂等挤出成型，中间有聚酯网布增强层，表面附以织物纤维、铝膜而制成的新型防水卷材。TPO防水卷材具有优异的耐候性和柔韧度。主要用于各种屋面、地下室、隧道等建筑用防水工程。
Application: TPO waterproof membrane is extruded by thermoplastic polyolefin consist of antioxidants, antiager and softener etc. The middle is polyester mesh fabric reinforcement layer, the surface laminates fabric fiber, aluminum foil. TPO waterproof membrane has excellent weather resistance and flexibility. Mainly used for various roofs, basement, tunnel construction.

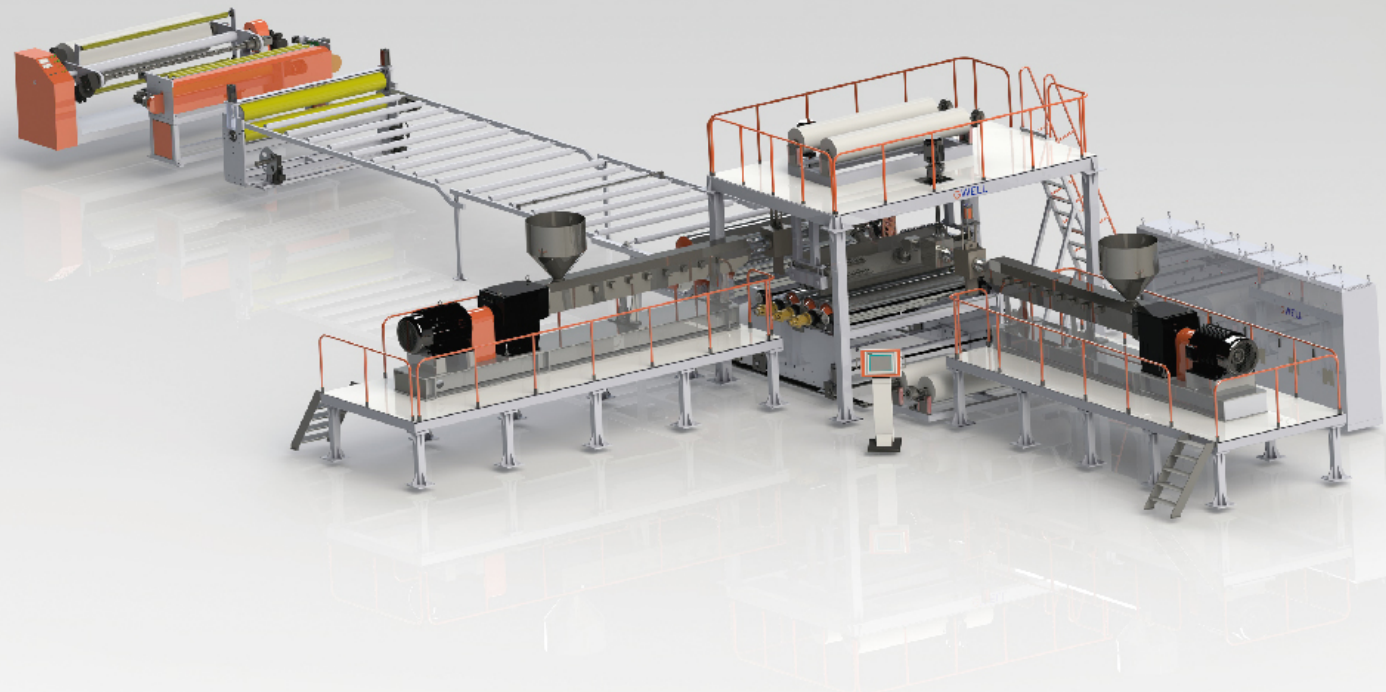

主要技术参数: Main Technical Specification			
Model	GWP75- GWP75	GWS130+GWS130	GWP95- GWP95
Material	TPO+ Net +TPO	TPO+ Net +TPO	TPO+ Net +TPO
Membrane width	2100mm	2100mm	2100mm
Membrane thickness	1-3mm	1-3mm	1-3mm
Max. capacity	800 kg/h	1000 kg/h	1200 kg/h
Designed line speed	10m/min	12m/min	15m/min


备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.

PVC Water Stop Extrusion Line

PVC止水带生产线

PVC water stop PVC止水带

用途：PVC止水带主要用于隧道、涵洞、引水渡槽、拦水坝、贮液构筑物、地下设施等工程。
Application: PVC water stop is mainly used in tunnels, culverts, water diversion aqueducts, dams, liquid storage structures, and underground facilities projects.

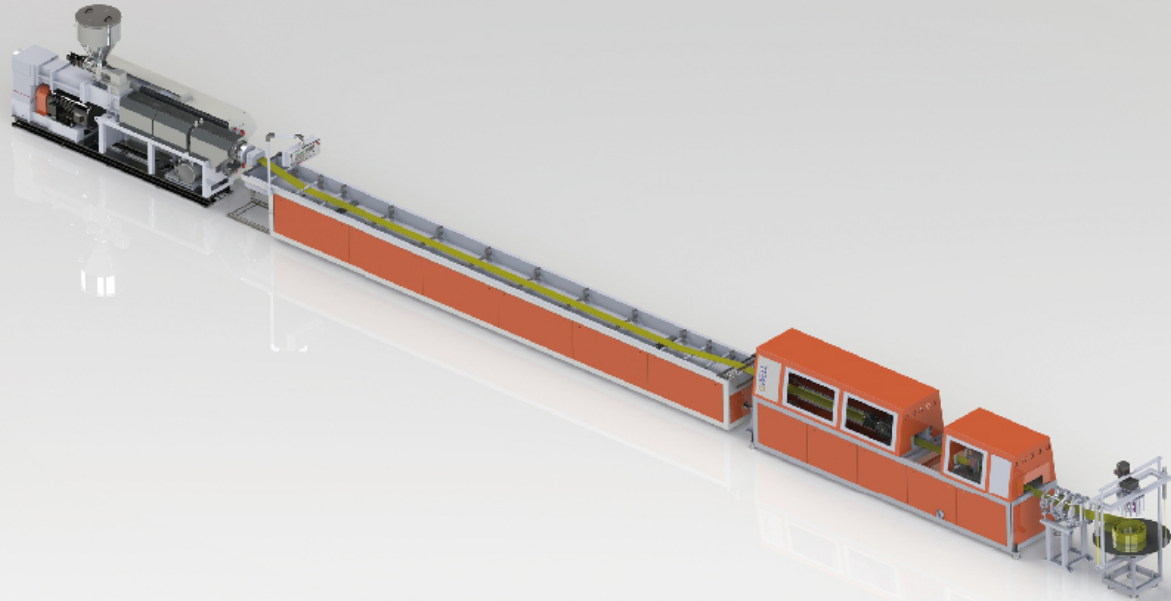

主要技术参数: Main Technical Specification			
Model	GWC80	GWP93	GWS150
Material	PVC	PVC	PVC
Water stop width	350mm	350mm	350mm
Water stop thickness	4-10mm	4-10mm	4-10mm
Max. capacity	400 kg/h	450 kg/h	500 kg/h
Designed line speed	10m/min	10m/min	10m/min

备注：以上规格参数如有变更，恕不另行通知。Note:The specifications are subject to change without prior notice.